

FORM PTO 1390
(REV 5-93)

US DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY DOCKET NUMBER
2001-1716ATRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. §371U.S. APPLICATION NO.
(if known, see 37 CFR 1.51)
NEW **10/031596**International Application No.
PCT/EP00/05332International Filing Date
June 9, 2000Priority Date Claimed
July 13, 1999**Title of Invention**

ENTERING INJECTION MOULDED PREFORMS IN A MOULD OF A HIGH-EFFICIENCY BLOW-MOULDING APPARATUS


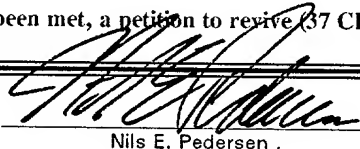
Applicant(s) For DO/EO/US
Matteo ZOPPAS

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. §371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. §371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. §371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. §371(h) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. §371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau. **ATTACHMENT A**
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☒ A translation of the International Application into English (35 U.S.C. §371(c)(2)). **ATTACHMENT B**
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. §371(c)(3)).
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19.
9. ☒ An (executed) oath or declaration of the inventor(s) (35 U.S.C. §371(c)(4)). **ATTACHMENT C**
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. §371(c)(5)).

Items 11. to 14. below concern other document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98. **ATTACHMENT D**
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. **ATTACHMENT E**
13. ☒ A **FIRST** preliminary amendment. **ATTACHMENT F**
 - ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☒ Other items or information: Notification of Transmittal of the International Preliminary Examination Report - **ATTACHMENT G**

| U.S. APPLICATION NO. 10/031596 NEW | | INTERNATIONAL APPLICATION NO. PCT/EP00/05332 | | ATTORNEY'S DOCKET NO. 2001-1716A | | | | | |
|--|--------------|---|---|--|----|--------------|--------------|-----------|--|
| 15. [X] The following fees are submitted BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)): Neither international preliminary examination fee nor international search fee paid to USPTO and International Search Report not prepared by the EPO or JPO \$1040.00 International Search Report has been prepared by the EPO or JPO \$ 890.00 International preliminary examination fee not paid to USPTO but international search paid to USPTO \$ 740.00 International preliminary examination fee paid to USPTO but claims did not satisfy provisions of PCT Article 33(1)-(4) \$ 690.00 International preliminary examination fee paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$ 100.00 ENTER APPROPRIATE BASIC FEE AMOUNT = | | | | <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:50%;">CALCULATIONS</th> <th style="width:50%;">PTO USE ONLY</th> </tr> <tr> <td style="height: 100px; vertical-align: bottom;">\$1040.00</td> <td></td> </tr> </table> | | CALCULATIONS | PTO USE ONLY | \$1040.00 | |
| CALCULATIONS | PTO USE ONLY | | | | | | | | |
| \$1040.00 | | | | | | | | | |
| Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)). | | | | \$ | | | | | |
| Claims | Number Filed | Number Extra | Rate | | | | | | |
| Total Claims | 30 -20 = | 10 | X \$18.00 | \$180.00 | | | | | |
| Independent Claims | 2 - 3 = | | X \$84.00 | \$ | | | | | |
| Multiple dependent claim(s) (if applicable) | | | + \$280.00 | \$ | | | | | |
| TOTAL OF ABOVE CALCULATIONS = | | | | \$1220.00 | | | | | |
| <input type="checkbox"/> Small Entity Status is hereby asserted. Above fees are reduced by 1/2. | | | | \$ | | | | | |
| SUBTOTAL = | | | | \$1220.00 | | | | | |
| Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)). | | | | + | \$ | | | | |
| TOTAL NATIONAL FEE = | | | | \$1220.00 | | | | | |
| Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40 per property + | | | | \$40.00 | | | | | |
| TOTAL FEES ENCLOSED = | | | | \$1260.00 | | | | | |
| | | | | Amount to be refunded | \$ | | | | |
| | | | | Amount to be charged | \$ | | | | |
| a. [X] A check in the amount of \$1260.00 to cover the above fees is enclosed. A duplicate copy of this form is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. 23-0975 in the amount of \$_____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. [X] The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>23-0975</u> . | | | | | | | | | |
| NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status. | | | | | | | | | |
| 19. CORRESPONDENCE ADDRESS <div style="text-align: center;">  000513 PATENT TRADEMARK OFFICE </div> | | | By:  Nils E. Pedersen, Registration No. 33,145 WENDEROTH, LIND & PONACK, L.L.P. 2033 "K" Street, N.W., Suite 800 Washington, D.C. 20006-1021 Phone: (202) 721-8200 Fax: (202) 721-8250 January 23, 2002 | | | | | | |

[CHECK NO. 48488]

[2001_1716A]

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of :
Matteo ZOPPAS : Attn: BOX PCT
Serial No. NEW : Docket No. 2001-1716A
Filed January 23, 2002 :

ENTERING INJECTION MOULDED
PREFORMS IN A MOULD OF A HIGH-
EFFICIENCY BLOW-MOULDING
APPARATUS

[Corresponding to PCT/EP00/05332
Filed June 9, 2000]

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents,
Washington, DC 20231

Sir:

Prior to examination of the above-referenced U.S. patent application please amend the application as follows:

IN THE CLAIMS

Please amend the claims as follows:

5. (Amended) Apparatus according to claim 1, characterized in that said central structure (20), to which said pairs of half-moulds are associated, is a rotary structure on a horizontal plane, and said pairs of half-moulds are arranged, preferably regularly spaced from each other, along a circular periphery centered on the axis of rotation of said rotary structure.

11. (Amended) Method according to claim 9, characterized in that the above cited phases c) and e) are adapted to be performed at least partially at the same time.

12. (Amended) Method according to claim 9, characterized in that said rotary central structure is adapted to support a plurality of pairs of said half-moulds, and that said five phases a) to e) are performed in an automatic, continuous and orderly sequence for said plurality of pairs of said half-moulds.

Please add the following new claims:

14. Apparatus according to claim 2, characterized in that said central structure (20), to which said pairs of half-moulds are associated, is a rotary structure on a horizontal plane, and said pairs of half-moulds are arranged, preferably regularly spaced from each other, along a circular periphery centered on the axis of rotation of said rotary structure.

15. Apparatus according to claim 3, characterized in that said central structure (20), to which said pairs of half-moulds are associated, is a rotary structure on a horizontal plane, and said pairs of half-moulds are arranged, preferably regularly spaced from each other, along a circular periphery centered on the axis of rotation of said rotary structure.

16. Apparatus according to claim 4, characterized in that said central structure (20), to which said pairs of half-moulds are associated, is a rotary structure on a horizontal plane, and said pairs of half-moulds are arranged, preferably regularly spaced from each other, along a circular periphery centered on the axis of rotation of said rotary structure.

17. Apparatus according to claim 14, characterized in that said pairs of half-moulds are comprised of a respective stationary half-mould (1) and a respective moving half-mould (2) capable of opening from and closing against the respective stationary half-mould.

18. Apparatus according to claim 15, characterized in that said pairs of half-moulds are comprised of a respective stationary half-mould (1) and a respective moving half-mould (2) capable of opening from and closing against the respective stationary half-mould.

19. Apparatus according to claim 16, characterized in that said pairs of half-moulds are comprised of a respective stationary half-mould (1) and a respective moving half-mould (2) capable of opening from and closing against the respective stationary half-mould.

20. Apparatus according to claim 17, characterized in that said stationary half-moulds are substantially joined to said appropriate central structure (20) and are arranged in a substantially vertical position, and the respective moving half-moulds (2) are adapted to move into clamping with a substantially rotary movement about respective horizontal axes of rotation.

21. Apparatus according to claim 18, characterized in that said stationary half-moulds are substantially joined to said appropriate central structure (20) and are arranged in a substantially vertical position, and the respective moving half-moulds (2) are adapted to move into clamping with a substantially rotary movement about respective horizontal axes of rotation.

22. Apparatus according to claim 19, characterized in that said stationary half-moulds are substantially joined to said appropriate central structure (20) and are arranged in a substantially vertical position, and the respective moving half-moulds (2) are adapted to move into clamping with a substantially rotary movement about respective horizontal axes of rotation.

23. Apparatus according to claim 20, characterized in that said horizontal axes are orthogonal to the axis of rotation of said rotary central structure.

24. Apparatus according to claim 21, characterized in that said horizontal axes are orthogonal to the axis of rotation of said rotary central structure.

25. Apparatus according to claim 22, characterized in that said horizontal axes are orthogonal to the axis of rotation of said rotary central structure.

26. Method according to claim 10, characterized in that the above cited phases c) and e) are adapted to be performed at least partially at the same time.

27. Method according to claim 10, characterized in that said rotary central structure is adapted to support a plurality of pairs of said half-moulds, and that said five phases a) to e) are performed in an automatic, continuous and orderly sequence for said plurality of pairs of said half-moulds.

28. Method according to claim 11, characterized in that said rotary central structure is adapted to support a plurality of pairs of said half-moulds, and that said five phases a) to e) are performed in an automatic, continuous and orderly sequence for said plurality of pairs of said half-moulds.

29. Method according to claim 27, characterized in that the rotation period of said rotary central structure coincides with the cycle time corresponding to the steps during which

- the preform is loaded in the mould,
- the mould is closed and clamped,
- the preform is blow moulded through the various steps connected with the process,
- the mould is opened by the separation of the respective half-moulds,
- the blow-moulded product is removed therefrom.

30. Method according to claim 28, characterized in that the rotation period of said rotary central structure coincides with the cycle time corresponding to the steps during which

- the preform is loaded in the mould,
- the mould is closed and clamped,
- the preform is blow moulded through the various steps connected with the process,
- the mould is opened by the separation of the respective half-moulds,
- the blow-moulded product is removed therefrom.

REMARKS


The present Preliminary Amendment is submitted to delete the multiple dependency of the claims, thereby placing such claims in condition for examination and reducing the required PTO filing fee.

Attached hereto is a marked-up version of the changes made to the claims by the current Preliminary Amendment. The attached page is captioned "**Version With Markings to Show Changes Made**".

Respectfully submitted,

Matteo ZOPPAS

By

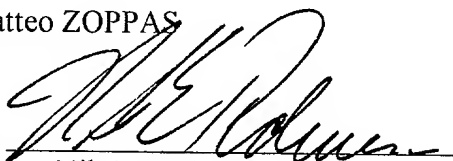

Nils E. Pedersen

Registration No. 33,145

Attorney for Applicant

NEP/krl
Washington, D.C. 20006-1021
Telephone (202) 721-8200
Facsimile (202) 721-8250
January 23, 2002

THE COMMISSIONER IS AUTHORIZED
TO CHARGE ANY DEFICIENCY IN THE
FEES FOR THIS PAPER TO DEPOSIT
ACCOUNT NO. 23-0975

5. (Amended) Apparatus according to [any of the preceding claims] claim 1, characterized in that said central structure (20), to which said pairs of half-moulds are associated, is a rotary structure on a horizontal plane, and said pairs of half-moulds are arranged, preferably regularly spaced from each other, along a circular periphery centered on the axis of rotation of said rotary structure.

11. (Amended) Method according to claim 9 [or 10], characterized in that the above cited phases c) and e) are adapted to be performed at least partially at the same time.

12. (Amended) Method according to [any of the claims 9 to 11] claim 9, characterized in that said rotary central structure is adapted to support a plurality of pairs of said half-moulds [according to claims 1 to 9], and that said five phases a) to e) are performed in an automatic, continuous and orderly sequence for said plurality of pairs of said half-moulds.

20031596-012300

13/ptp

WO 01/07235

PCT/EP00/05332

5

10. ENTERING INJECTION MOULDED PREFORMS IN A MOULD OF A HIGH-EFFICIENCY BLOW-MOULDI
NG APPARATUS

DESCRIPTION

The present invention refers to an improved apparatus and a related process for
15 blow moulding preforms of thermoplastic material, in particular such an apparatus
as generally described in the Italian patent application no. PN98A000042 filed by
this same Applicant.

The peculiarities of the apparatus described in the above-cited patent
20 application lie in the fact that it is provided with:

- a plurality of pairs of mutually joinable half-moulds, which are associated to an
appropriate, preferably revolving structure for handling said half-moulds, and
preform support devices corresponding to said half-moulds,

25 - a preform feeding mechanism to deliver an orderly sequence of preforms held
at an appropriate blow-moulding temperature into the respective pairs of half-
moulds kept in their opened position and associated to said rotary member,

30 - a pick-up device adapted to recover the finished container from the respective
pair of half-moulds upon the opening thereof,

- an opening and clamping mechanism adapted to clamp the half-moulds
together after they have moved through the position of the preform feeding

10031596-01300

méchanism, and to open them before they move through the position of the pick-up mechanism for removing the finished container, in which said pairs of half-moulds are constituted by a stationary half-mould and a moving half-mould capable of being opened from and clamped against said stationary half-mould.

5

In particular, said stationary half-moulds are substantially joined to said structure, which is preferably rotating about a vertical axis, and are arranged in a substantially vertical position, with the moving half-moulds adapted to be clamped against the respective stationary half-moulds with a substantially rotary movement
10 having a horizontal axis of rotation.

The other general, construction and use characteristics of the apparatus according to the present invention are thoroughly described in the afore cited Italian patent application no. PN98A000042, to which reference should therefore be
15 made.

Anyway, to the purpose of favouring a better and readier understanding by a reader, the origin of and the technical-industrial ground on which said patent is based are briefly recalled here. In practice, it has been originated by the fact that,
20 according to prior-art techniques, the blowing moulds in an in-line arrangement turn out to be particularly critical, since with increasing blow-moulding pressures, as well as with increasing numbers of cavities contained in each single pair of blow-moulding plates, increasingly rapid and powerful pumping stations are required. Furthermore, the increased overall pressure generated by the bottles during blow
25 moulding must be contrasted by a correspondingly greater mould clamping pressure.

However, such a pressure, which is not only considerably higher, but also pulsating, has a negative effect also on the actual resistance of the same moulds,
30 which are not only caused to undergo a greater pressure, but are at the same time required to withstand such a greater pressure on a longer arm, considering the greater number of blowing gates, and this of course makes their rigidity more critical and their tendency to deform outwardly much more likely, with easily

imaginable effects on the quality of the blow-moulding process and the blow-moulded bottles themselves.

Furthermore, when blowing moulds provided with a great number of cavities
5 are used, the time required to transfer all preforms into the respective cavities increases proportionally, and this of course causes the whole cycle time to INCREASE under a clear reduction in the productivity of the moulding apparatus.

Just in view of doing away with these drawbacks, the practice is known from the
10 disclosures in the publications US 3,596,315 – US 4,233,022 – EP 0 596 487 – US 4,850,850 and US 4,313,720 of using to preform blow moulding purposes apparatuses that are adapted to rotate about a vertical axis in a carousel-like manner, in which the outer sides are occupied by a plurality of blowing half-moulds capable of opening from and clamping against each other in an orderly and
15 sequential manner. However, in these apparatuses it is actually both half-moulds that are driven to move. They furthermore move in a so-called "book-like" manner, in that each one of them moves about a respective vertical axis.

Apparatuses of this kind are connected with generally known drawbacks and
20 construction complications, since both half-moulds must be handled to move synchronically. Furthermore, the fact that they open in a horizontal direction, and therefore by widening apart, makes it necessary for the entire carousel-like arrangement to be sized correspondingly; it in particular requires apparatuses to be used which are significantly larger and, therefore, more awkward to be handled
25 and installed.

In view of doing away with the problems connected with the use of moving half-moulds rotating about respective vertical axes, an apparatus of the kind described in the afore mentioned Italian patent application has been disclosed.

30

Nevertheless, even this kind of apparatus has still some problem left with it and offers margins for further improvement, which may be summarized as follows:

WO 01/07235

PCT/EP00/05332

- the need for the neck of the preform to be locked in place, ie. clamped with a mould (the half-moulds) makes it necessary for the same preform to be released from its transferring means only upon the half-moulds being completely clamped together; this of course requires that the related operations be carried out in series, 5 ie. in a sequence, under resulting greater usage of time, which of course contributes to an increased overall cycle time and, therefore, a marked reduction in the performance capabilities and the general productivity of the entire apparatus;

- furthermore, upon the final container having been blow-moulded, the opening 10 of the mould quite frequently gives rise to a slight displacement of the respective container and this makes much more difficult for an appropriately provided pick-up and unloading member to engage the neck portion of the container and then transfer the same container into the next station.

From US 4.035,463 it is known a method and an apparatus for blowing plastic preforms in a rotary table (EIII) with blow molds. Each of said blow molds consists of two symmetrical halves (62), supported by a common vertical spindle, so that said halves are misplaced in the horizontal plane. Furthermore, the preforms are previously heated and positioned in a concurring rotary table (EII) and the transfer from said heating table (EII) and the blowing rotary table (EIII) is carried out by a rotary station (D) where rotation axis is vertical, as the vertical spindle (55). However, if a blowing machine is used, having blowing halves, one of which is fixed and oriented outwards, the other being rotatable on an horizontal spindle (instead of a vertical spindle), the technical arrangement and solution described in the cited US patent can not be used due to the interference between said station (D) rotating horizontally and the halves blow mold rotating vertically.

10031595-012302

HEI

15 Based on the above considerations, it is therefore a main purpose of the present invention to provide the blow moulding apparatus for the production of hollow bodies, as well as the operating mode thereof, in such a manner as to enable its productivity to be increased by the effect of an accelerated movement of the blowing half-moulds.

20

 A further purpose of the present invention is to make it possible for the blow-moulded container to be firmly and reliably held in position when the respective half-moulds are opened.

25

 The apparatus and the method according to the present invention shall furthermore be capable of being implemented with the use of currently available techniques and, therefore, shall be reasonably low-cost, reliable and preferably capable of being integrated with a preform production stage situated upstream.

30

 These aims, along with other features of the present invention, are reached in a blow moulding apparatus that is made and operates as recited in the appended claims, and may be implemented in some parts, or arrangements thereof, a preferred embodiment of which is described below in detail and illustrated with

reference to the accompanying drawings, in which:

- Figures 1 through to 5 are respective perspective views of a portion of apparatus according to the invention, as illustrated to represent five subsequent
5 operating phases;

- Figures 1a, 1b are top views of the portion of apparatus of Figure 1 and the median cross-section thereof taken along the section A - A of Figure 1a, respectively;

10

- Figures 2a and 2b are views similar to those of Figures 1a, 1b above, but referred to Figure 2; the same applies also to Figures 3a and 3b, 4a and 4b, and 5a and 5b with reference to the perspective views in Figures 3, 4 and 5;

15 - Figure 6 is a different perspective, partly see-through view of the same assembly of Figure 4;

- Figure 7 is a simplified view along the section B - B of Figure 6;

20 - Figure 8 is a perspective view of a component part of an apparatus according to the present invention;

- Figures 9 and 10 are a bottom and a front view, respectively, of the component part of Figure 8.

25

The basic peculiarity of the present invention lies in the use, in an apparatus of the described type, of devices and methods that are capable of locating and clamp a preform in a suitable position in view of the subsequent blow moulding step, regardless of the actual position of the respective pair of blow-moulding half-
30 moulds.

This result is obtained, in a pair of blow-moulding half-moulds 1 and 2, by means of following devices:

- a fork means 3 which is firmly joined to a first one 1 of said blow-moulding half-moulds 1 and 2,

5 - a small-tube assembly 4 adapted to be at least partially inserted in the mouth opening 6 of the preform 7 when the latter is associated to said fork means 3,

- a pincer-like gripper 5 adapted to transport said preform so as to enable it to engage the respective fork means 3.

10

If Figures 1 through to 5 are in particular observed, along with the respective top and cross-sectional views, at least following five phases can be identified, in which said component parts are caused to operate in a coordinated manner so as to achieve the desired result.

15

Said five phases, each one of which is represented by the illustrations in the subsequent Figures 1, 2, 3, 4 and 5 for reasons of greater simplicity, may be described as follows:

20 Phase a) Figure 1. The half-moulds 1 and 2 are at least partially open; the gripper 5, to which the preform 7 is coupled, is gradually approached to the fork means 3, and namely to a receptacle 8 provided facing the second half-mould 2; in this phase, the small-tube assembly 4 is in a position in which it is raised from its working position, which will be explained in greater
25 detail further on;

25

Phase b) Figure 2. The gripper 5 transports the preform 7 up to into said receptacle 8 of the fork means 3. In particular, it is the cylindrical portion underneath the neck ring 14 of the preform that fits into said receptacle 8, so that the
30 preform itself is positively prevented from sliding downwards and also from displacing laterally with respect to the half-mould 1.

All other illustrated component parts remain in their initial position, with the exception of the second half-mould 2 which can start, or continue, its

clamping stroke.

Phase c). Figure 3. The small-tube assembly 4 is lowered until it is inserted in the mouth opening 6 of the preform.

5 This small-tube assembly is formed by an insert 10, in the interior of which there is slidably arranged a traditional stretching rod 11; this insert has a substantially cylindrical shape and is provided with a plurality of external ribs 13 which are in such a size and geometry as to be able to get exactly inserted into the inner cylindrical wall of the mouth portion of the preform, so that, when said insert is lowered with the small-tube assembly 4, it becomes disposed on to the preform in a firmly joined manner therewith.

10 Furthermore, between said outer ribs 13 there are provided corresponding passages 14 adapted to enable gas to flow from the outside of the preform into the interior of the latter (see Figures 8, 9 and 10); the purpose of these passages is to enable the gas needed to blow mould the preforms to flow in when the small-tube assembly 4 is lowered and, therefore, when the respective insert is firmly fitted into the mouth portion of the respective preform.

20

Phase d) Figure 4. The gripper 5 is separated from the respective preform and is moved into an appropriate position in view of a subsequent preform loading phase.

25 The possibility for the gripper 5 to be separated by simply pulling it away is ensured in a particularly easy and safe manner, without any risk of damaging the preform, if a gripper is used of the type described in the Italian utility model application no. PN99U000023 filed by this same Applicant.

30 It should be noticed that it is in this phase d) that the condition is practically created which brings about most of the advantage offered by the present invention: in fact, the stability of the position of the preform is determined by the combined action of the insert 10, which prevents the preform from moving or displacing tangentially, and the fork means 3 which, by

engaging the preform underneath the neck ring 14 thereof, prevents it from sliding downwards.

In this condition, the preform itself is completely associated in a firm manner to a half-mould, in a position in which it is adapted to be blow moulded, regardless of the position of the other counter-mould, which can in this way continue with its clamping stroke.

Phase e) Figure 5. The two half-moulds are completely clamped against each other; in particular, the moving half-mould 2 brings its previously started stroke to completion, so as to close in on the half-mould 1.

It can therefore be readily recognized that a saving can be obtained on the overall cycle time if the fact is duly considered that final positioning of the preform in view of blow moulding takes actually place well in advance of the half-moulds being closed and clamped together, so that the preform handling gripper is able to start releasing the preform and moving away beforehand and the time required for the moulds to be clamped in order to have the preform duly locked in position can actually be saved (since the preform itself is already locked in position by the above cited means).

From this phase on, the process goes on according to the traditional technique until the actual blow-moulding phase is eventually completed, at the end of which the half-moulds are then separated and the blow-moulded container is removed by a respective gripper in a sequence of operations that is fully similar to, albeit in the reverse order, the sequence followed for loading the preform in the mould:

The reader should furthermore duly notice that the use of the small-tube assembly 4, comprising its insert piece and stretching rod, is not to be considered as being inherently part of the present invention, since similar devices are already known and used in the technical practice. An integral part of this invention is on the contrary the particular type of totally new and original use that is made of such a small-tube assembly.

In fact, this small-tube assembly is used not only to perform traditionally as a stretching rod and channel for the blow-moulding gas to flow therethrough, but also as an innovative means for centering the preform and locking it in position by acting in combination with the afore mentioned fork means, in such a manner as to lock the
5 preform in the desired position without using the half-moulds and regardless of the position of the same half-moulds.

In practice it can be concluded that, with the method according to the present invention, ie. owing to the clamping phase of the moving half-mould occurring
10 almost at the same time as the preform insertion phase, as well as the opening phase of the same moving half-mould occurring almost at the same time as the moulded-container removal or ejection phase, thanks to the particular conformation, arrangement and use of the afore described devices, a reduction in total blow-moulding cycle time can actually be obtained.

15 The described apparatus and method can be most effectively used if a plurality of pairs of half-moulds are applied all along the outer periphery of a generally per se known central rotary structure 20, in which:

- 20 - in each one of said pairs, one of said half-moulds 1 is stationary and joined to said rotary structure and is preferably arranged on a vertical plane with the respective half-cavity 1A facing outwards and oriented radially with respect to said rotary structure;
- 25 - the other half-mould 2 is movable with a rotary motion about an axis arranged on the horizontal plane as hinged on a rotation device (not shown) in such a manner that, when it is raised into its clamped position, it is able to move into exact coupling with said stationary half-mould joined to said rotary structure. In this way the need will only arise for the sole opening and closing movement of the moving half-mould
- 30 2 to be actuated, since the other half-mould 1 is stationary and substantially joined to the rotary structure 20.

Therefore, if the various phases into which the cycle time can be broken down,

ie. (to name just the more important ones):

- preform insertion (at a fixed station),
- lowering of the small-tube assembly,
- 5 - mould clamping,
- blow moulding,
- mould opening,
- raising of the small-tube assembly,
- removal and unloading of the finished container at a fixed station,

10

are so adjusted and arranged as to be able to be carried out during exactly a complete rotation of the rotary structure, a particularly efficient and simple apparatus will be obtained which is capable of ensuring a really considerable productivity-to-size (ie. space requirements) ratio as compared with rotary

15 apparatuses of a traditional type.

WO 01/07235

PCT/EP00/05332

5

CLAIMS

10

1. Apparatus for blow moulding hollow plastic containers, comprising:

- a plurality of pairs of openable and closable half-moulds capable of being coupled to each other and clamped together, said pairs being associated to an appropriate central structure (20).

15

- devices to handle, transfer and introduce the preforms in said corresponding half-moulds as these are kept in their open position,

- a pick-up device adapted to remove the blow-moulded container from the pair of half-moulds upon them being opened, ie. separated,

- a mould opening and closing mechanism adapted to close, ie. clamp said half-moulds together upon them having passed through the position in which preform insertion is carried out, and to open, ie. separate said half-moulds from each other in correspondence of the mechanism provided to remove the finished container therefrom,

~~characterized in that~~

25 ~~there are provided~~ means adapted to arrange a respective preform in a pre-defined position suitable for blow moulding, and to hold it in this position regardless of the position and mutual relation of said respective pair of half-moulds, in particular when said half-moulds are at least partially open, ie. separated from each other,

30

~~2. Apparatus according to claim 1, characterized in that said means comprise:~~

- a fork member (3) joined to a respective stationary half-mould (1) and provided with a receptacle (8) adapted to place the respective preform into said

WO 01/07235

PCT/EP00/05332

respective pre-defined position,

- a pincer-like gripper (5) adapted to transfer a respective preform (7) from an external position and automatically fit it into said receptacle (8) of the respective fork member (3), as well as to automatically disengage from said preform upon the latter having been firmly fitted into said respective receptacle.

- a small-tube assembly (4) adapted to move into inserting in the mouth portion (6) of said preform when the latter is so restrained in said respective receptacle (8).

- 2/
3. Apparatus according to claim 1, characterized in that the locked condition of said preform is determined:

- either by it engaging said pincer-like gripper (5),
- or by the combined action of said fork member (3) and the respective small-tube assembly (4).

- 3/
4. Apparatus according to claim 2, characterized in that said small-tube assembly comprises:

- a substantially cylindrical insert piece (10) adapted to firmly fit into the mouth portion of the respective preform,
- a stretching rod (11), which is provided slidably inside of said insert piece and is adapted to be displaced in a rectilinear manner into the respective preform when said respective insert piece is so firmly fitted into the mouth portion of said respective preform.

- 4/
5. Apparatus according to claim 3, characterized in that said insert piece (10) is provided along its periphery with a plurality of passages or recesses (14) adapted to enable gas to flow from the outside to the inside of the respective preform when said insert piece is fully and firmly fitted and locked into the respective preform.

- 5/
6. Apparatus according to any of the preceding claims, characterized in that said central structure (20), to which said pairs of half-moulds are associated, is a rotary structure on a horizontal plane, and said pairs of half-moulds are arranged, preferably regularly spaced from each other, along a circular periphery centered on the axis of rotation of said rotary structure.

WO 01/07235

PCT/EP00/05332

6
7. Apparatus according to claim ⁵6, characterized in that said pairs of half-moulds are comprised of a respective stationary half-mould (1) and a respective moving half-mould (2) capable of opening from and closing against the respective
5 stationary half-mould.

7
8. Apparatus according to claim ⁶7, characterized in that said stationary half-moulds are substantially joined to said appropriate central structure (20) and are arranged in a substantially vertical position, and the respective moving half-moulds
10 (2) are adapted to move into clamping with a substantially rotary movement about respective horizontal axes of rotation.

8
9. Apparatus according to claim ⁷8, characterized in that said horizontal axes are orthogonal to the axis of rotation of said rotary central structure.

15
9
10. Method for inserting and locking a preform in a pre-determined position of a pair of blow-moulding half-moulds, characterized in that it comprises following five phases, in which:

a) - said preform is approached to said pre-determined position by means of a
20 respective gripper (5) adapted to engage said preform, said gripper being capable to be transferred in a controllable manner into an appropriate disposition with respect to a pre-defined one (1) of said half-moulds:

b) - said preform is locked in place with respect to an appropriate receptacle member (8) that is firmly joined to said pre-defined one (1) of said half-moulds;

25 c) - an appropriate small-tube assembly, which is comprised of an insert piece (10) and a respective stretching rod (11), is inserted in the mouth portion (6) of said preform;

d) - said gripper (5) automatically disengages from the respective preform;

e) - said pair of half-moulds moves into closing and clamping.

30
10
11. Method according to claim ⁹10, characterized in that the above cited phases d) and e) are adapted to be performed at least partially at the same time.

WO 01/07235

PCT/EP00/05332

^{9 10}
~~M~~ 12. Method according to claim ~~10~~ or ~~11~~, characterized in that the above cited phases c) and e) are adapted to be performed at least partially at the same time.

¹²
~~13~~. Method according to any of the claims ^{9 11}~~10~~ to ~~13~~, characterized in that said
 5 rotary central structure is adapted to support a plurality of pairs of said half-moulds according to claims 1 to 9, and that said five phases a) to e) are performed in an automatic, continuous and orderly sequence for said plurality of pairs of said half-moulds.

¹³
 10 ~~14~~. Method according to claim ¹²~~13~~, characterized in that the rotation period of said rotary central structure coincides with the cycle time corresponding to the steps during which

- the preform is loaded in the mould,
- the mould is closed and clamped,
- 15 - the preform is blow moulded through the various steps connected with the process,
- the mould is opened by the separation of the respective half-moulds,
- the blow-moulded product is removed therefrom.

10031596-012300

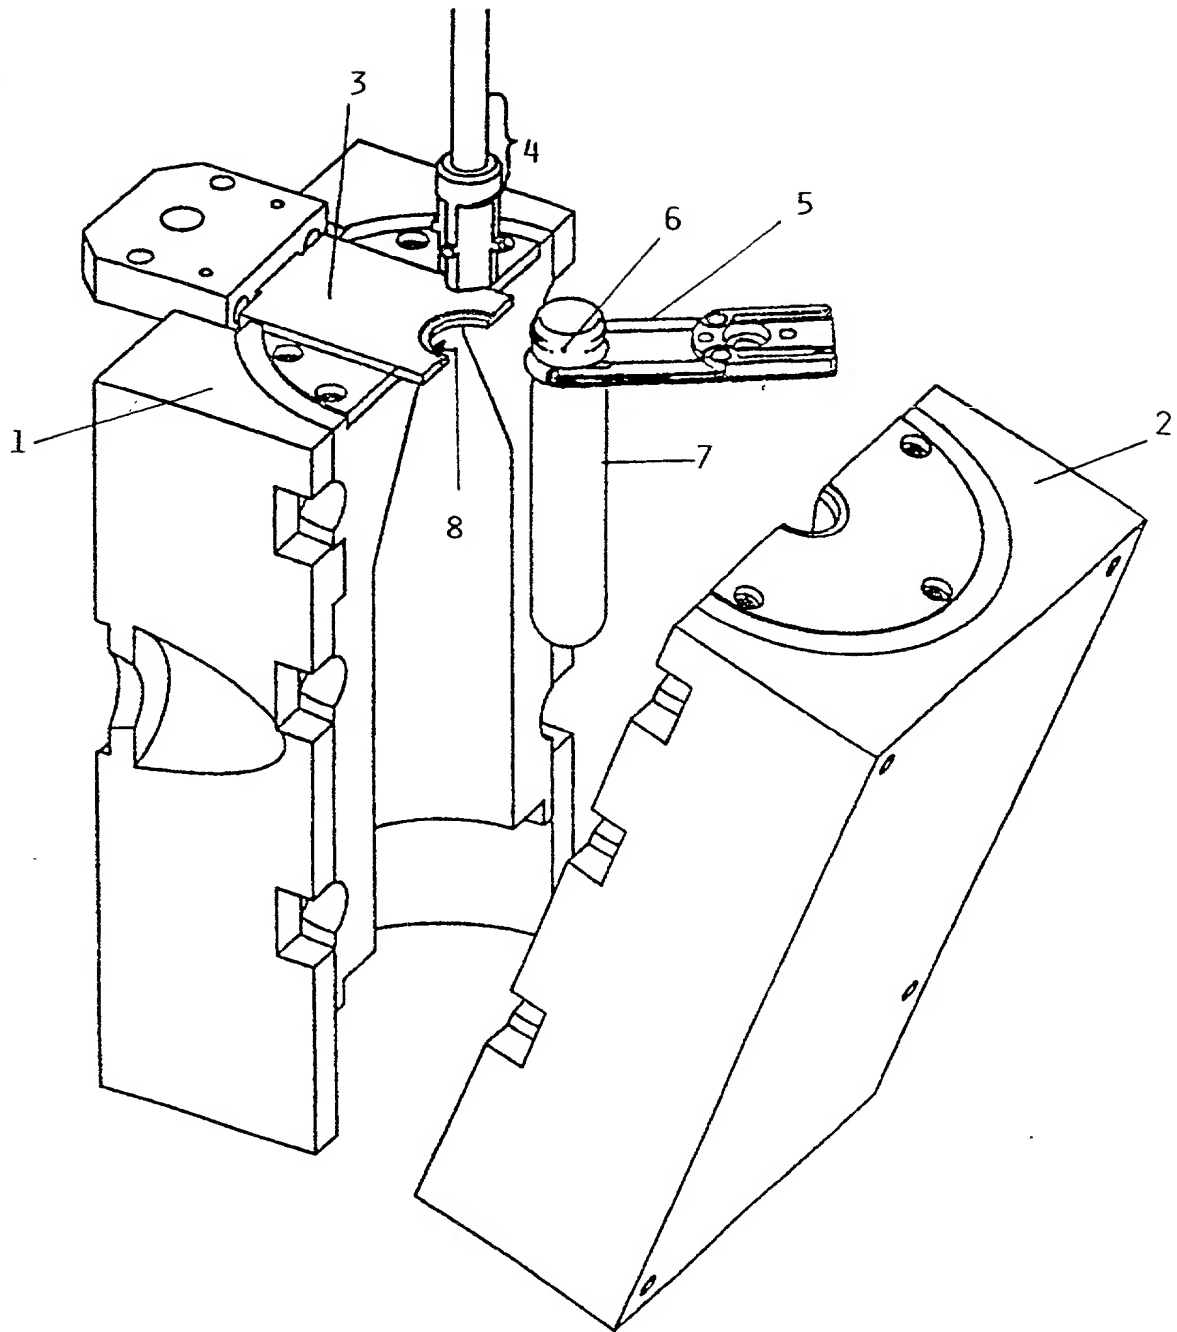
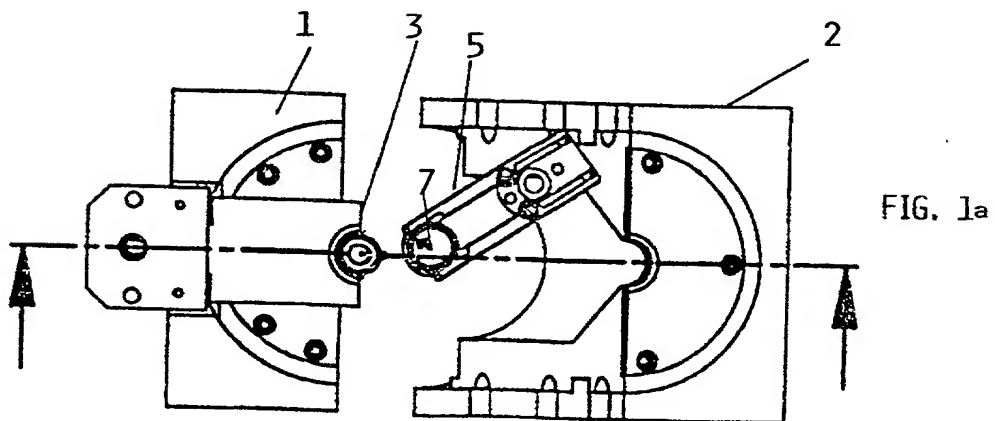
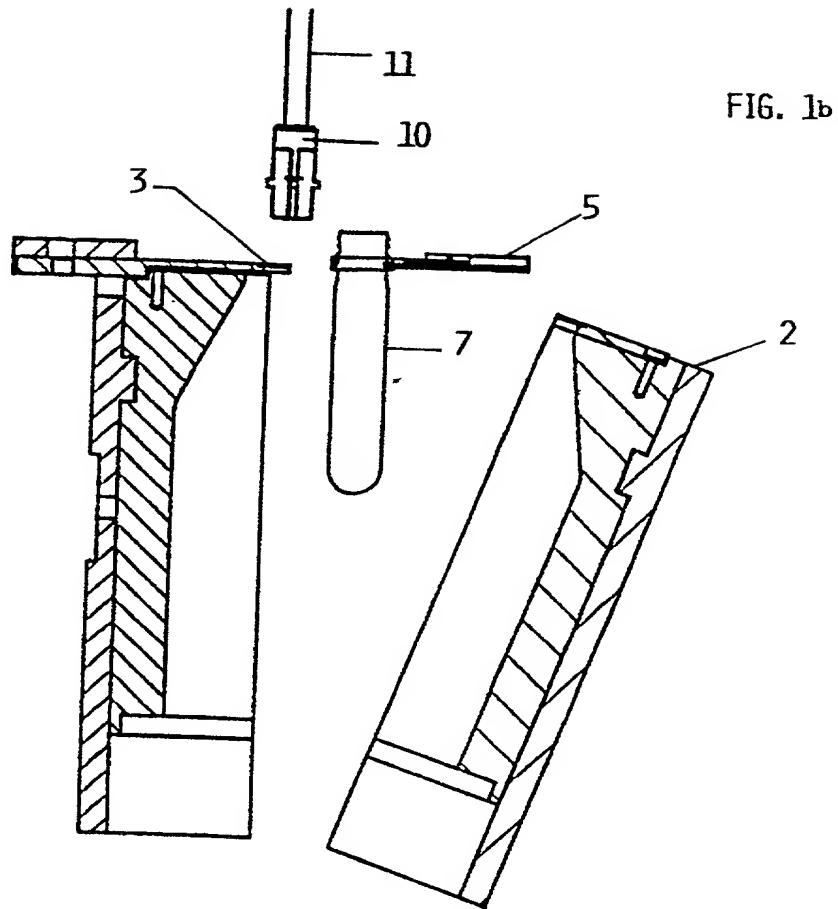


FIG. 1



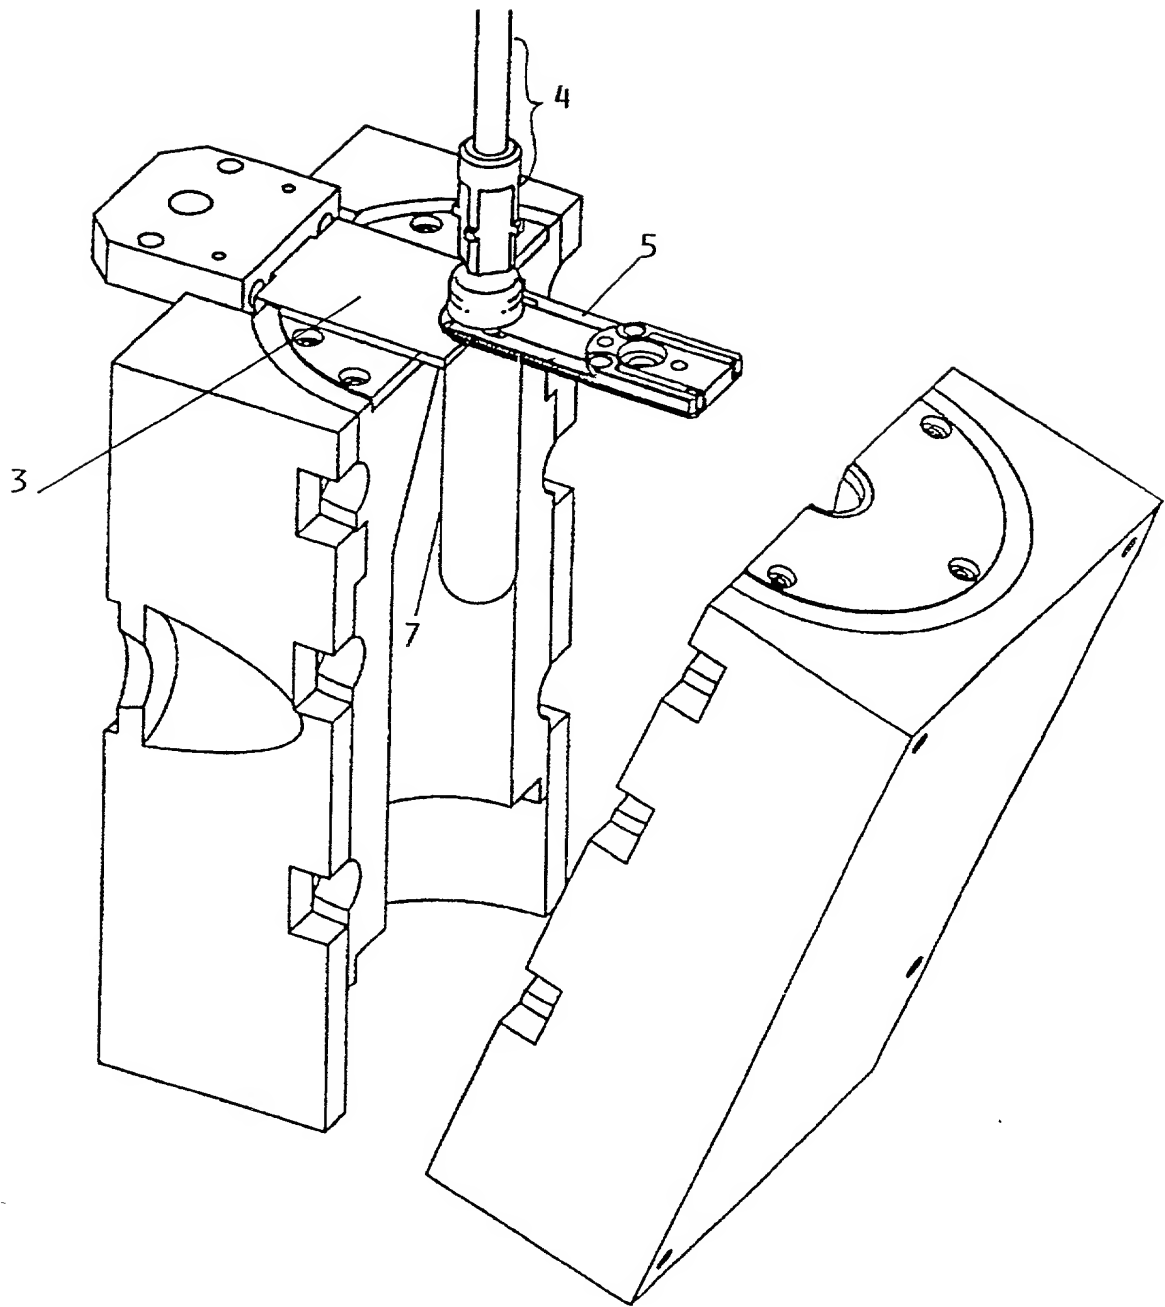


FIG. 2

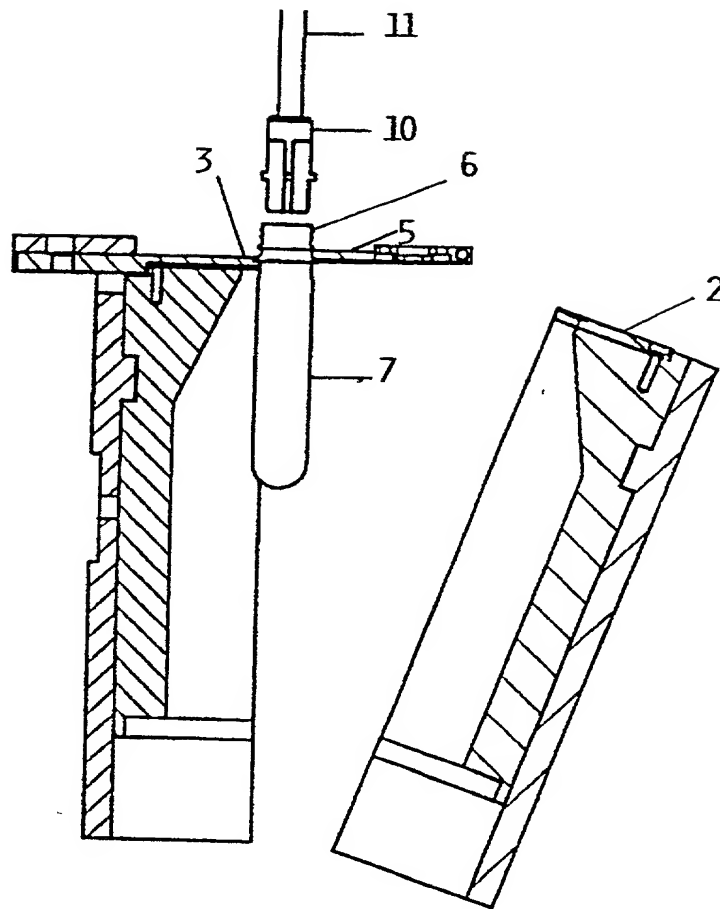


FIG. 2b

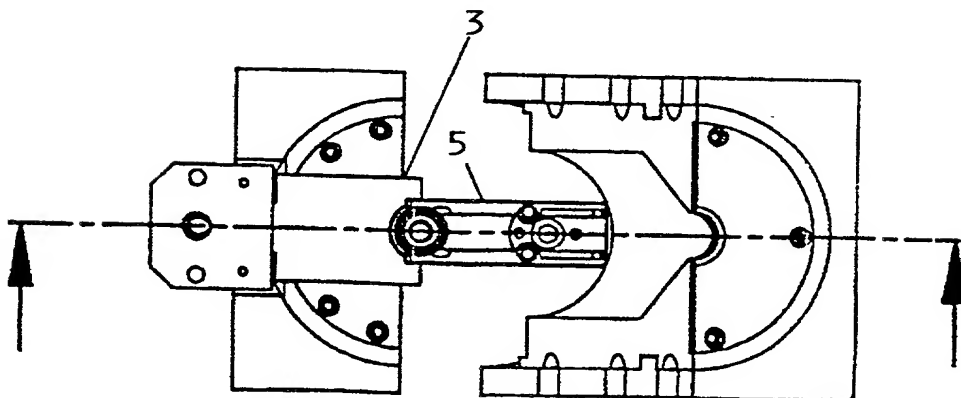


FIG. 2a

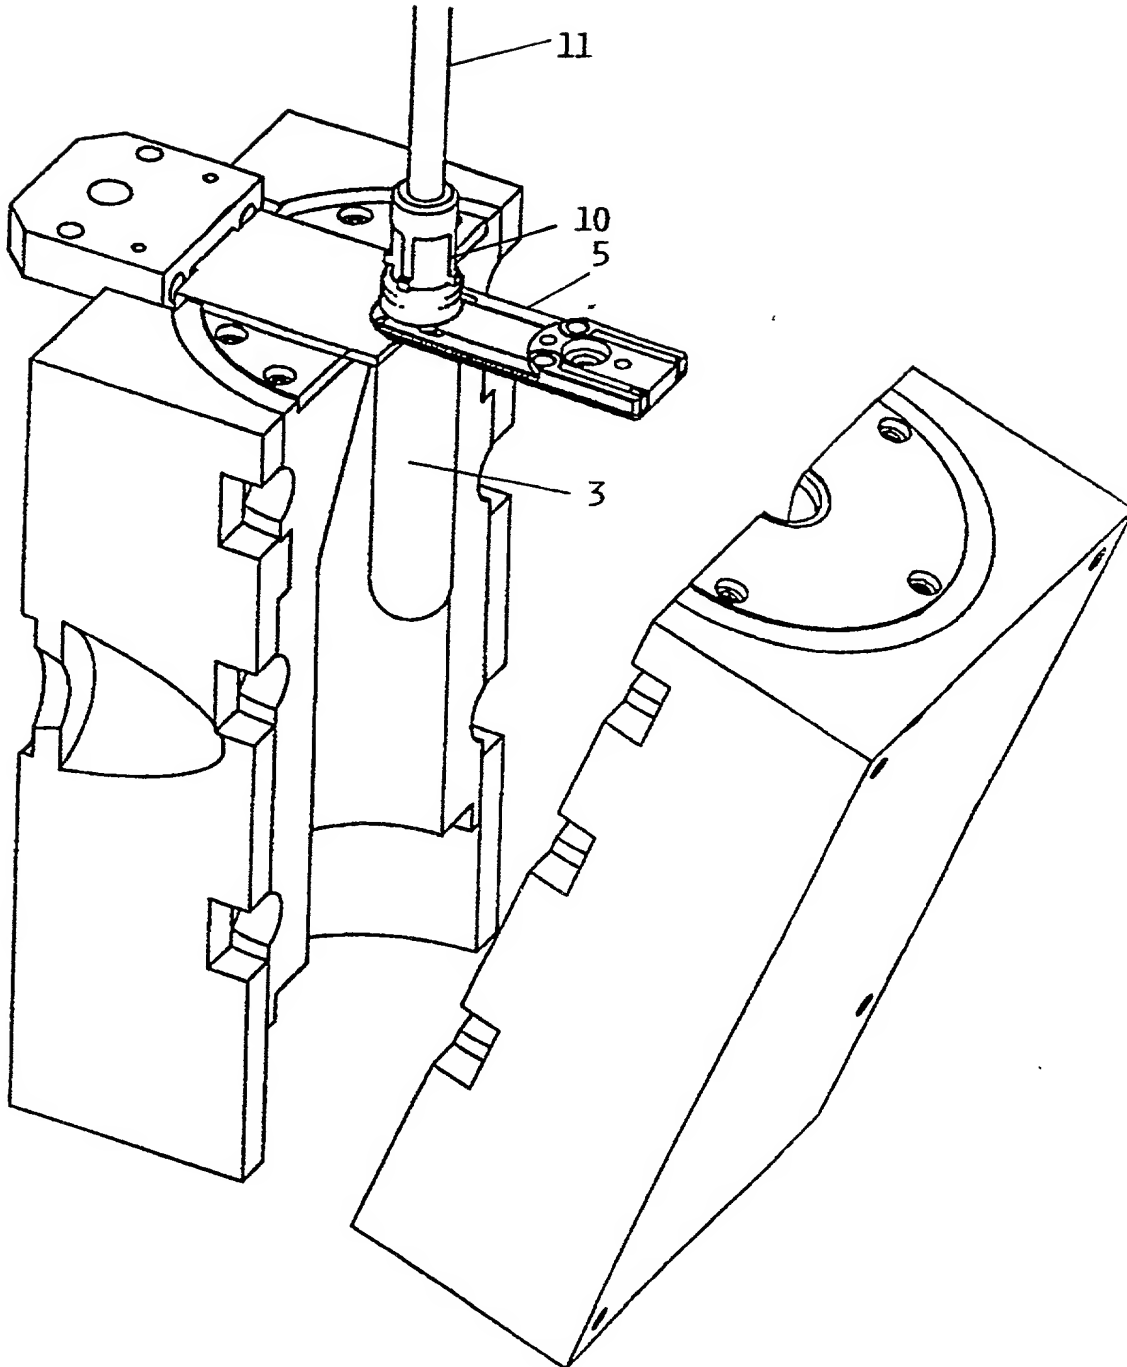


FIG. 3

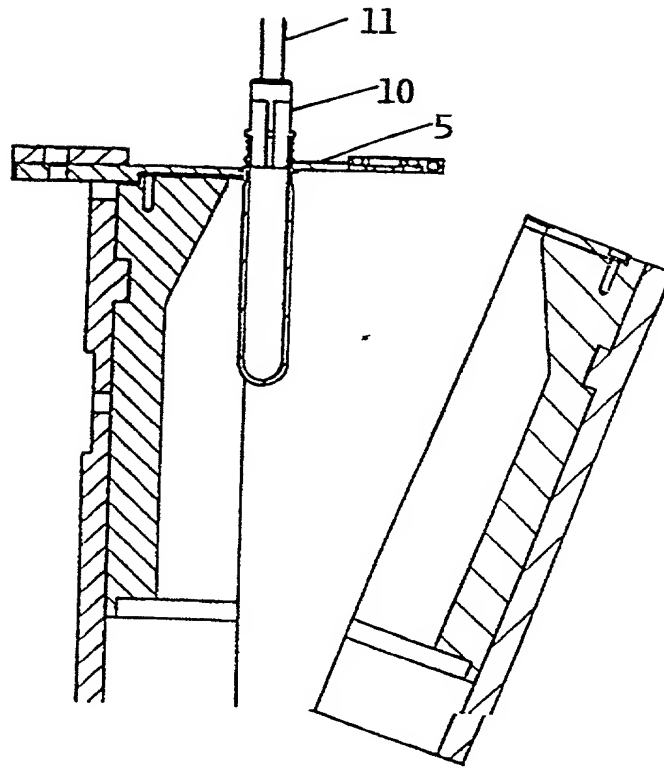


FIG. 3b

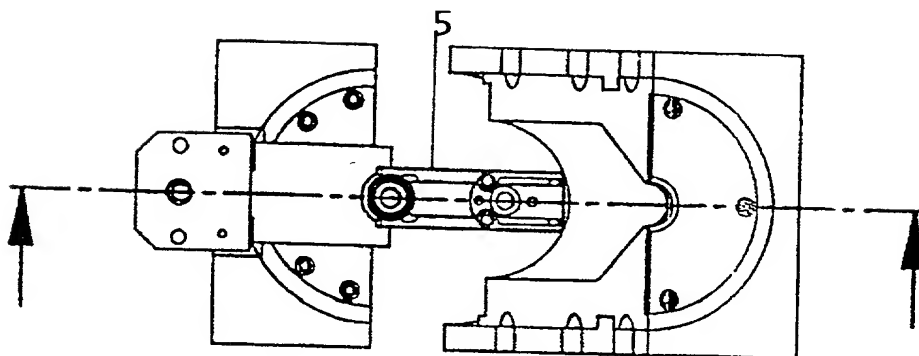


FIG. 3a

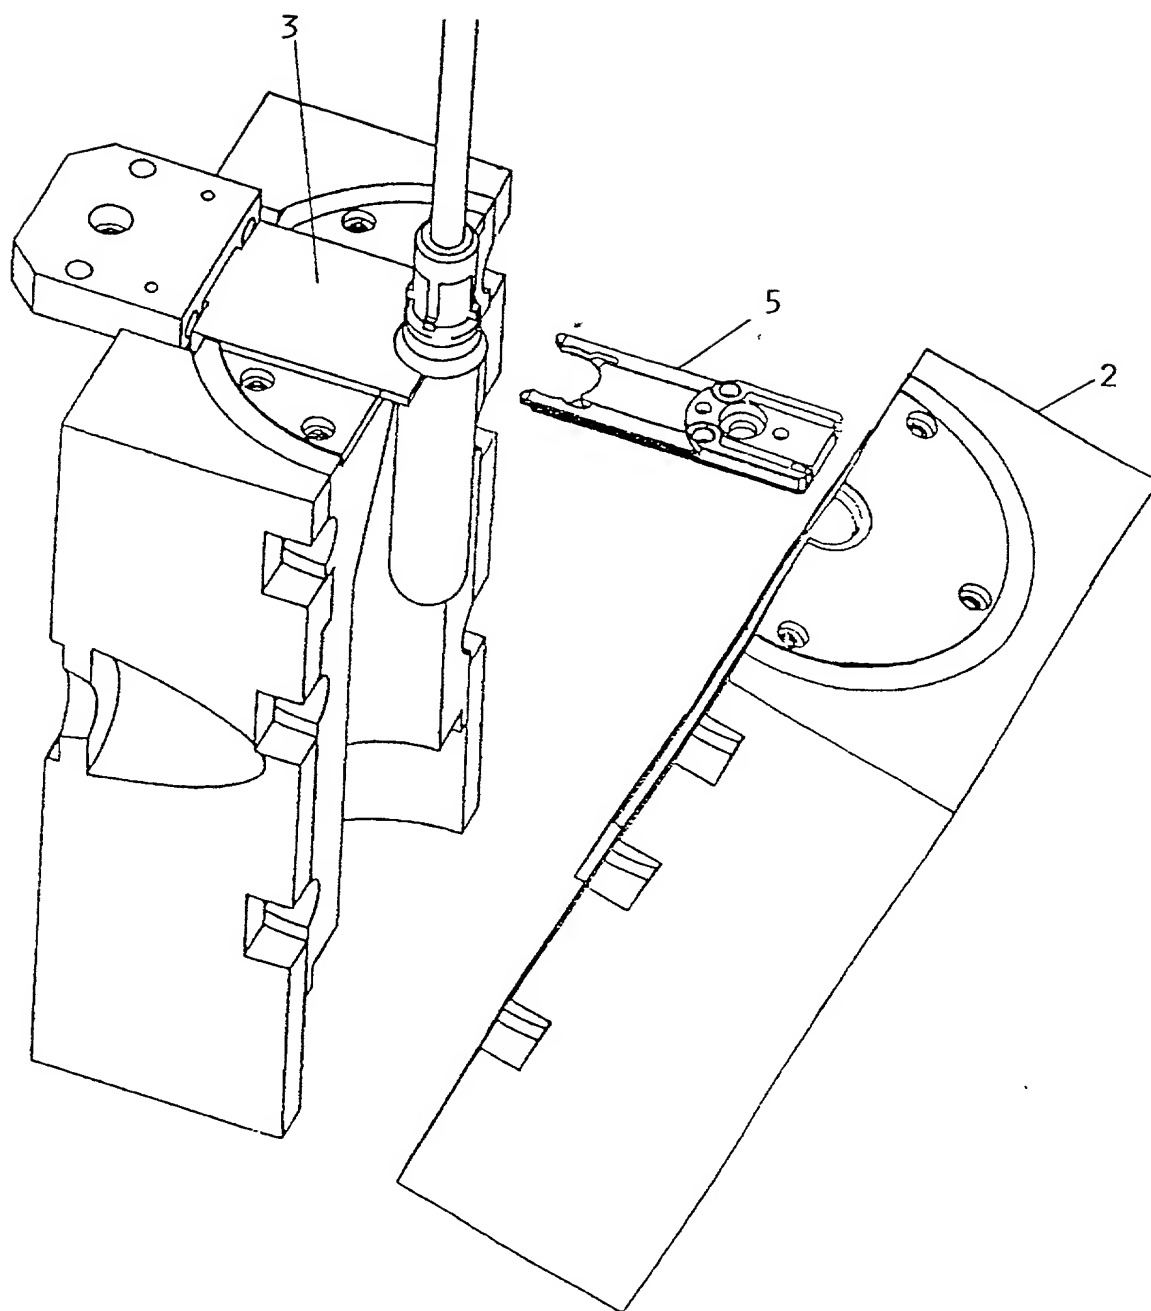


FIG. 4

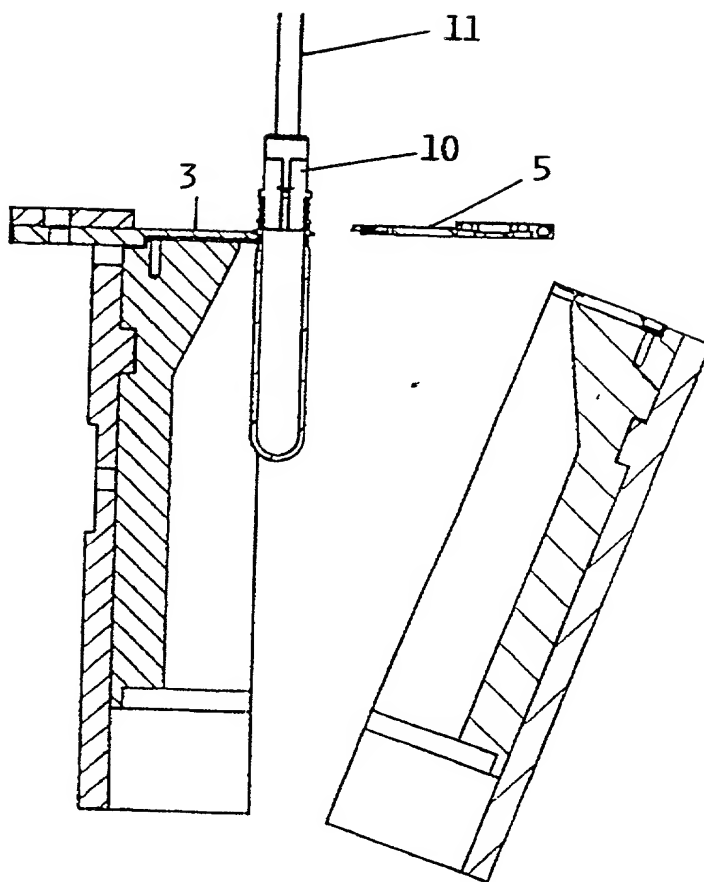


FIG. 4b

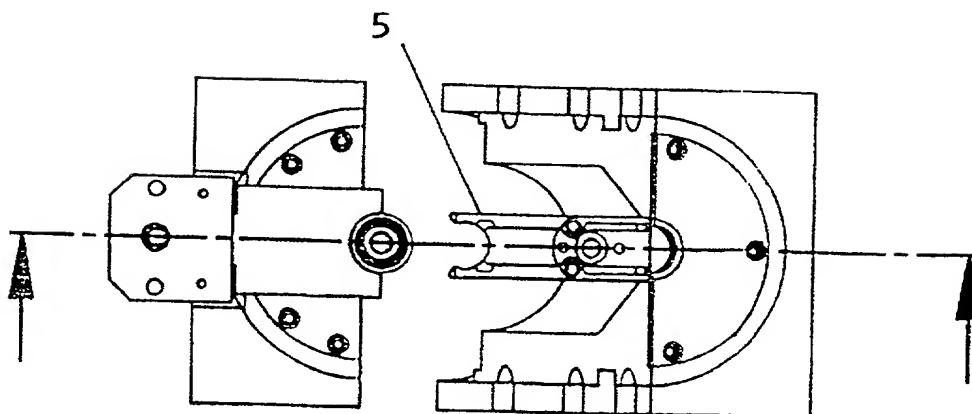


FIG. 4a

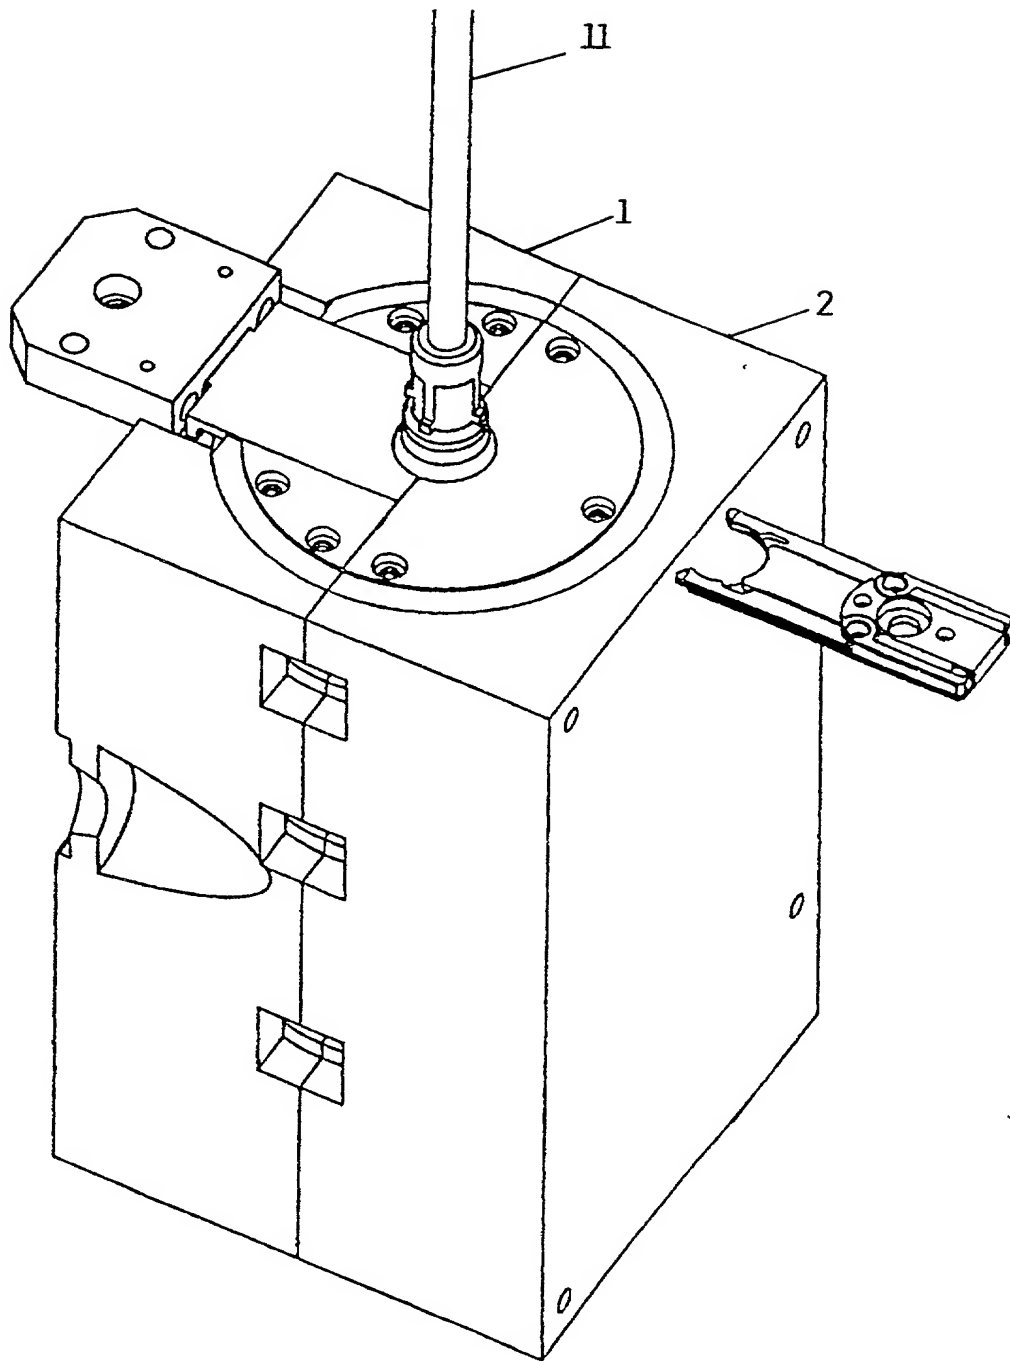


FIG. 5

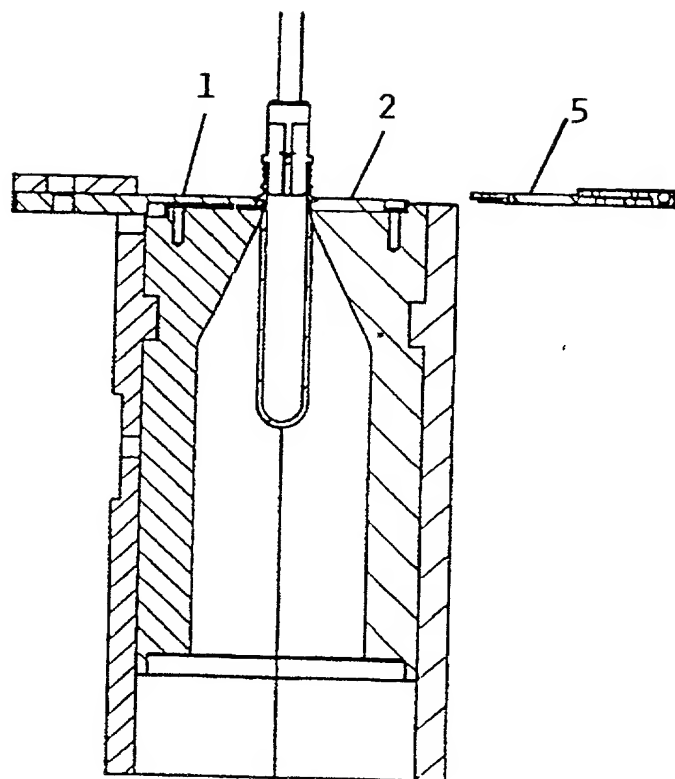


FIG. 5b

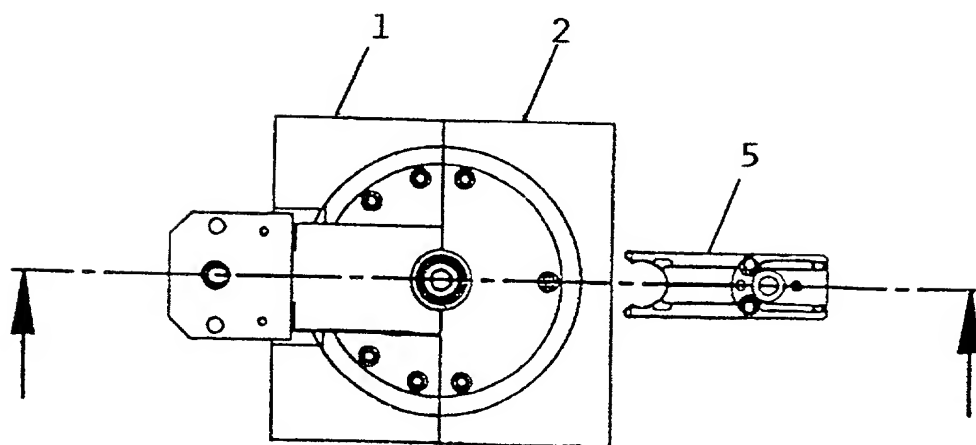


FIG. 5a

10-03/596

WO 01/07235

PCT/EP00/05332

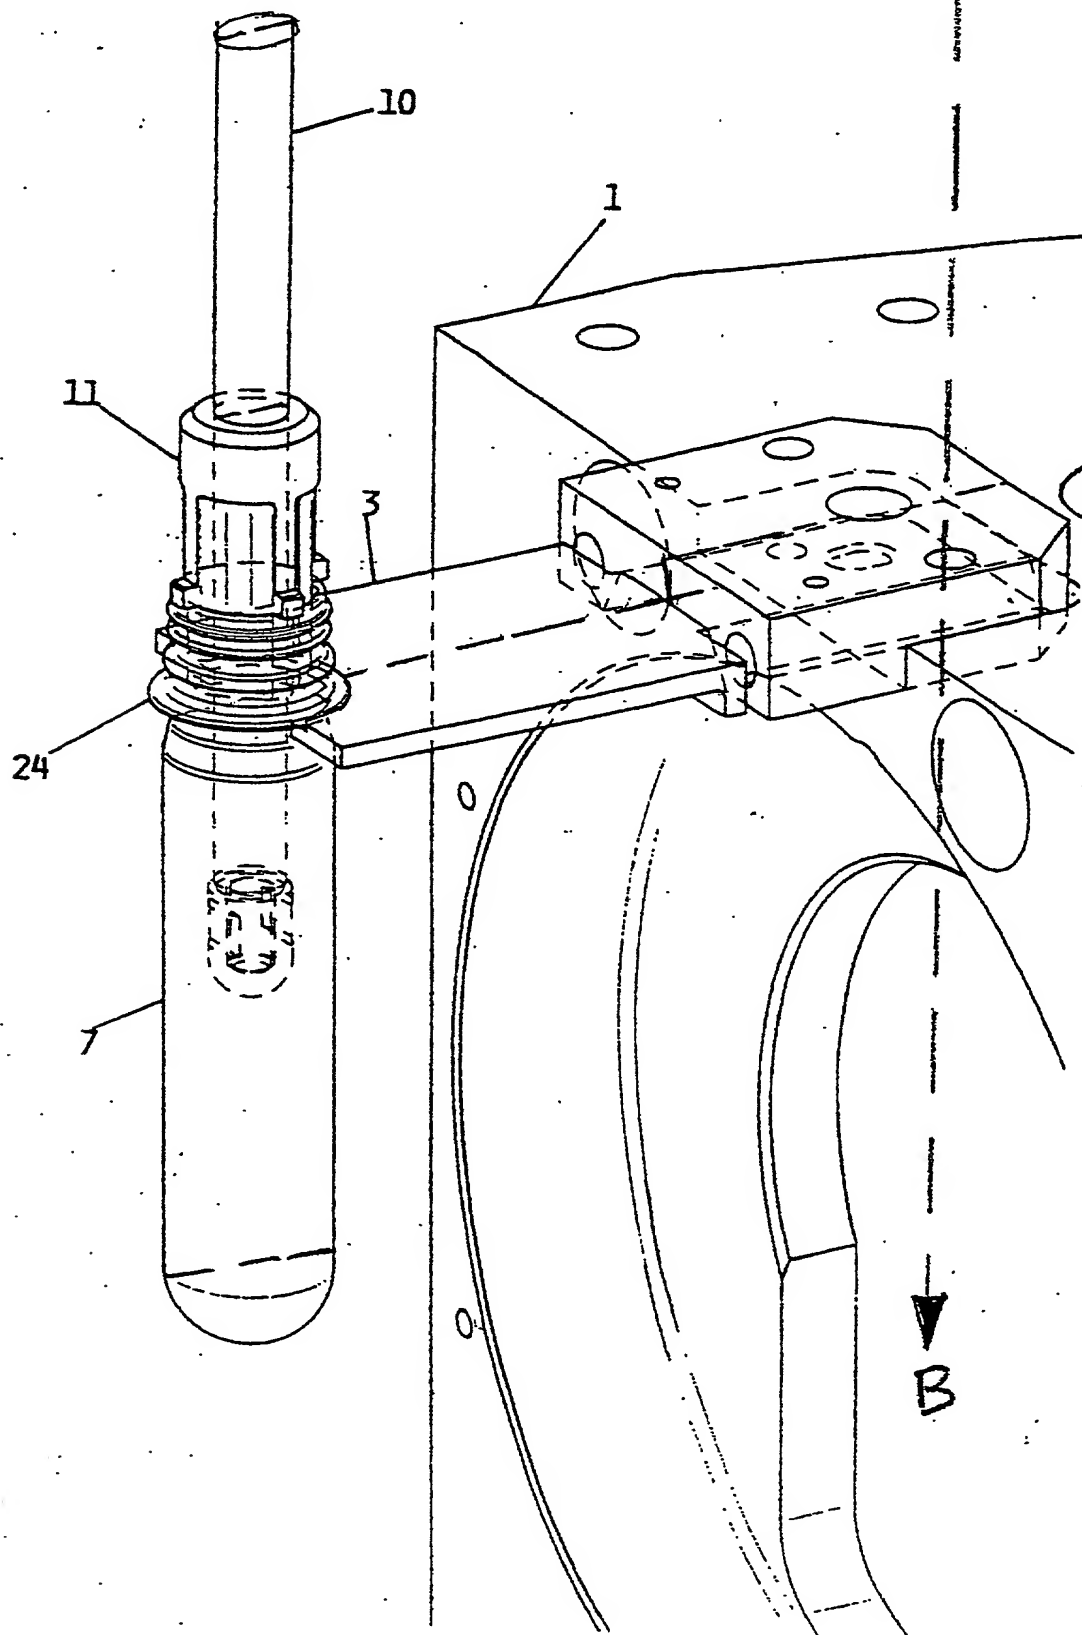


FIG. 6 A

AMENDED SHEET

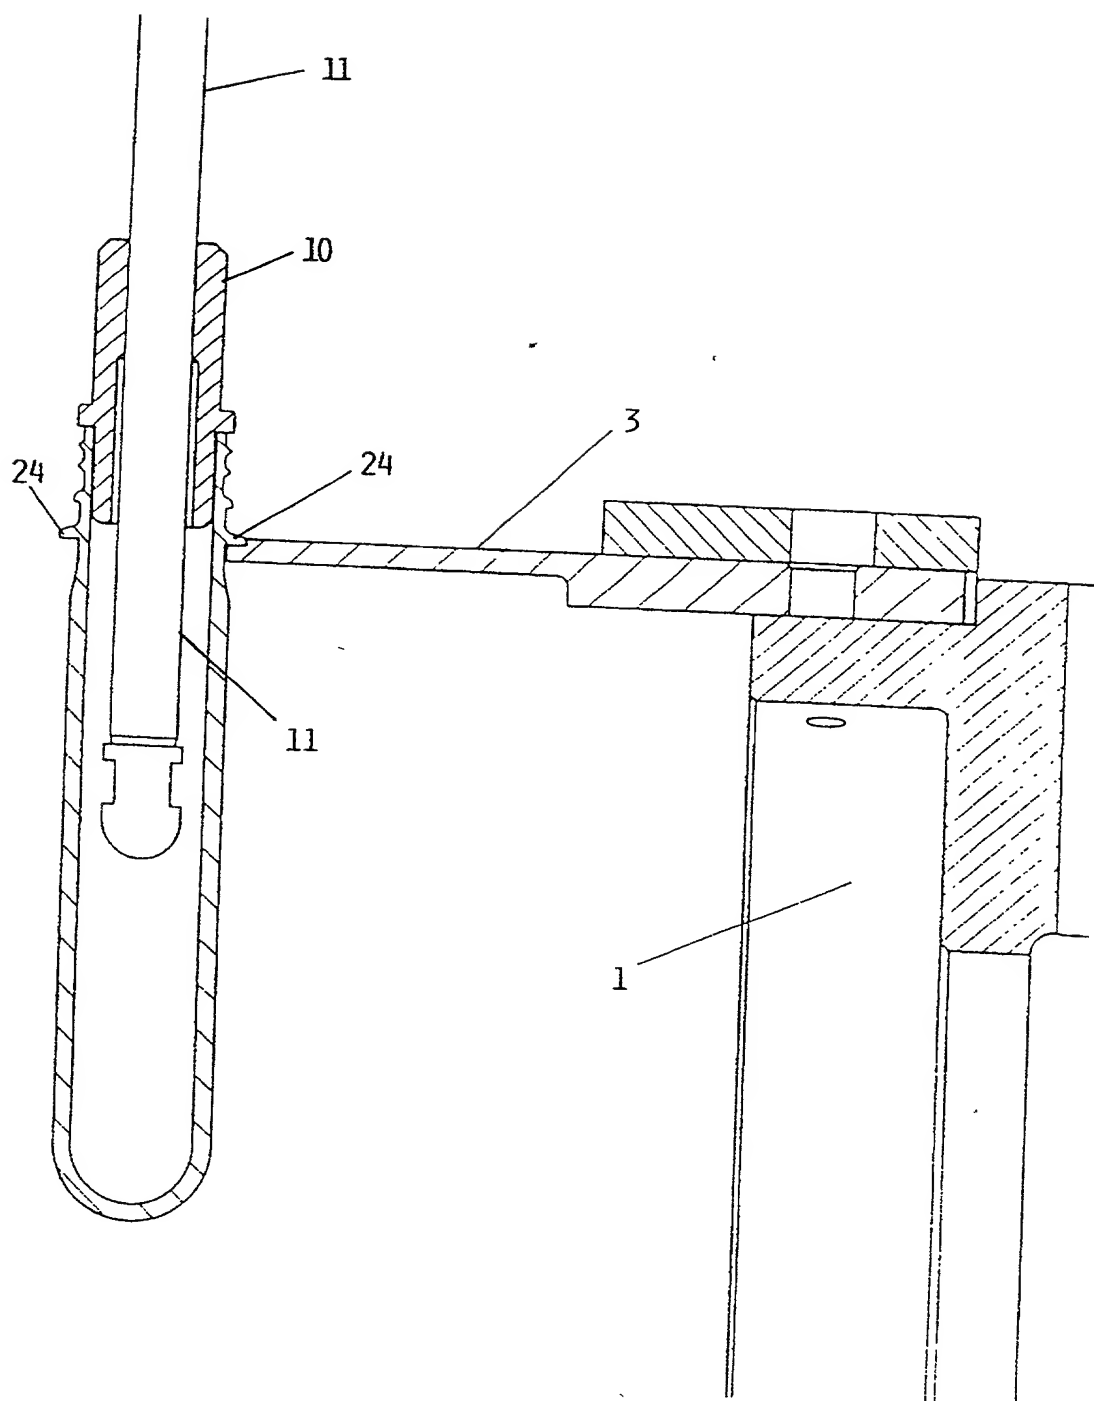


FIG. 7

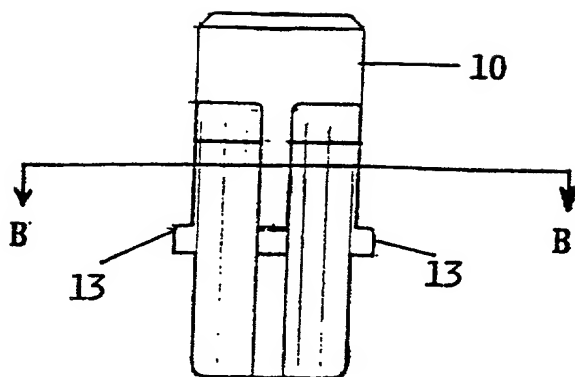


FIG. 10

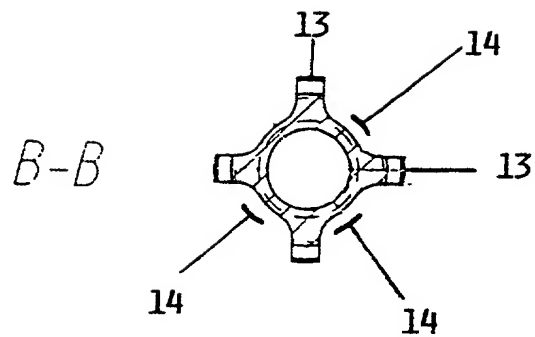


FIG. 9

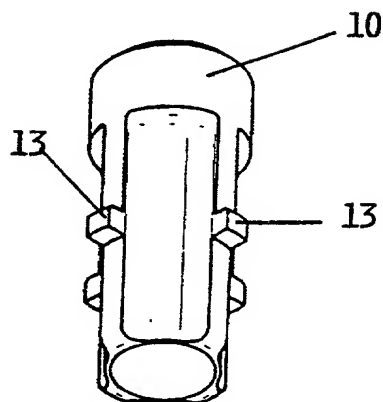


FIG. 8

Rev. 3-21-01

Effective March 1998

DECLARATION AND POWER OF ATTORNEY FOR U.S. PATENT APPLICATION

☐ Original ☐ Supplemental ☐ Substitute ☒ PCT ☐ DESIGN

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name, that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Title: ENTERING INJECTION MOULDED PREFORMS IN A MOULD OF A HIGH-EFFICIENCY BLOW-MOULDING APPARATUS

of which is described and claimed in:

☐ the attached specification, or
☐ the specification in application Serial No. _____, filed _____, and with amendments through _____, or
☒ the specification in International Application No. PCT/EP00/05332, filed June 9, 2000, and as amended on May 9, 2001 (if applicable).

I hereby state that I have reviewed and understand the content of the above-identified specification, including the claims, as amended by any amendment(s) referred to above.

I acknowledge my duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim priority benefits under Title 35, United States Code, §119 (and §172 if this application is for a Design) of any application(s) for patent or inventor's certificate listed below and have also identified below any application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

| COUNTRY | APPLICATION NO. | DATE OF FILING | PRIORITY CLAIMED |
|---------|-----------------|----------------|------------------|
| Italy | PN99A000063 | July 23, 1999 | YES |
| | | | |
| | | | |

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

| APPLICATION SERIAL NO | U.S. FILING DATE | STATUS: PATENTED, PENDING, ABANDONED |
|-----------------------|------------------|--------------------------------------|
| | | |
| | | |

And I hereby appoint Michael R. Davis, Reg. No. 25,134; Matthew M. Jacob, Reg. No. 25,154; Warren M. Cheek, Jr., Reg. No. 33,367; Nils Pedersen, Reg. No. 33,145; Charles R. Wats, Reg. No. 33,142; and Michael S. Huppert, Reg. No. 40,268, who together constitute the firm of WENDEROTH, LIND & PONACK, L.L.P., as well as any other attorneys and agents associated with Customer No. 000513, to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith.

I hereby authorize the U.S. attorneys and agents named herein to accept and follow instructions from Propria S.r.l. as to any action to be taken in the U.S. Patent and Trademark Office regarding this application without direct communication between the U.S. attorneys and myself. In the event of a change in the persons from whom instructions may be taken, the U.S. attorneys named herein will be so notified by me.

Direct Correspondence to Customer No.



000513

PATENT TRADEMARK OFFICE

Direct Telephone Calls to:

WENDEROTH, LIND & PONACK, L.L.P.
2033 "K" Street, N.W., Suite 800
Washington D.C. 20006-1021

Phone: (202) 721-8200
Fax: (202) 721-8250

 100
 "SECRET"

| | | | | | | | |
|------------------------------|--|------------------------------------|--|--------------------------------|--|---------------------------------|--|
| Full Name of First Inventor | | FAMILY NAME ZOPPAS | | FIRST GIVEN NAME Matteo | | SECOND GIVEN NAME | |
| Residence & Citizenship | | CITY Fontanafredda | | STATE OR COUNTRY Italy | | COUNTRY OF CITIZENSHIP Italy | |
| Post Office Address | | ADDRESS Via Silvio Pellico, 54, | | CITY 1-33074 Fontanafredda, | | STATE OR COUNTRY Italy | |
| Full Name of Second Inventor | | FAMILY NAME | | FIRST GIVEN NAME | | SECOND GIVEN NAME | |
| Residence & Citizenship | | CITY | | STATE OR COUNTRY | | COUNTRY OF CITIZENSHIP | |
| Post Office Address | | ADDRESS | | CITY | | STATE OR COUNTRY | |
| Full Name of Third Inventor | | FAMILY NAME | | FIRST GIVEN NAME | | SECOND GIVEN NAME | |
| Residence & Citizenship | | CITY | | STATE OR COUNTRY | | COUNTRY OF CITIZENSHIP | |
| Post Office Address | | ADDRESS | | CITY | | STATE OR COUNTRY | |
| Full Name of Fourth Inventor | | FAMILY NAME | | FIRST GIVEN NAME | | SECOND GIVEN NAME | |
| Residence & Citizenship | | CITY | | STATE OR COUNTRY | | COUNTRY OF CITIZENSHIP | |
| Post Office Address | | ADDRESS | | CITY | | STATE OR COUNTRY | |
| Full Name of Fifth Inventor | | FAMILY NAME | | FIRST GIVEN NAME | | SECOND GIVEN NAME | |
| Residence & Citizenship | | CITY | | STATE OR COUNTRY | | COUNTRY OF CITIZENSHIP | |
| Post Office Address | | ADDRESS | | CITY | | STATE OR COUNTRY | |
| Full Name of Sixth Inventor | | FAMILY NAME | | FIRST GIVEN NAME | | SECOND GIVEN NAME | |
| Residence & Citizenship | | CITY | | STATE OR COUNTRY | | COUNTRY OF CITIZENSHIP | |
| Post Office Address | | ADDRESS | | CITY | | STATE OR COUNTRY | |

03/12/2001 23:17
DEC 3 2001 3:19PM

202 721 8250
TENDEROT LIND & PONACH

NO. 0019

P. 5

I further declare that all statements made herein of my own knowledge are true, and that all statements on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon

1st Inventor Matteo Zoppas Date January 17, 2002
Matteo ZOPPAS

2nd Inventor _____ Date _____

3rd Inventor _____ Date _____

4th Inventor _____ Date _____

5th Inventor _____ Date _____

6th Inventor _____ Date _____

The above application may be more particularly identified as follows:

U.S. Application Serial No. NEW Filing Date

Applicant Reference Number SIPA/99/193 Atty Docket No. 2001-1716A

Title of Invention ENTERING INJECTION MOULDED PREFORMS IN A MOULD OF A HIGH-EFFICIENCY BLOW-MOULDING APPARATUS

2002-10-01 09:55:00